

Duplex Cable, Plenum



Features and Benefits

- 3mm, 2mm, 1.8mm and 1.6mm OD sizes to meet all patch cord applications
- Consistent 3.5 – 5 lbs-f for easy stripability
- Available in custom colors



Description

The Light Connection Duplex Cable is composed of a tight buffer, aramid yarn, and a PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards.

TLC Duplex Cable is available in 12 TIA standard colors or special order colors. UL Listed OFNP cables are available, and unlisted, unrated cables can be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers. Custom print can also be accommodated. Contact our sales team for cables designed to your specifications.

Application
Plenum

Flame Rating
NFPA262

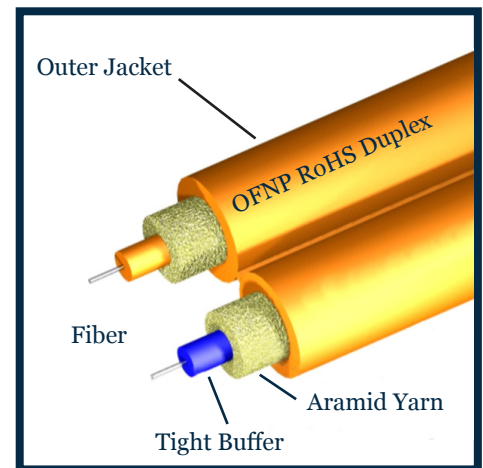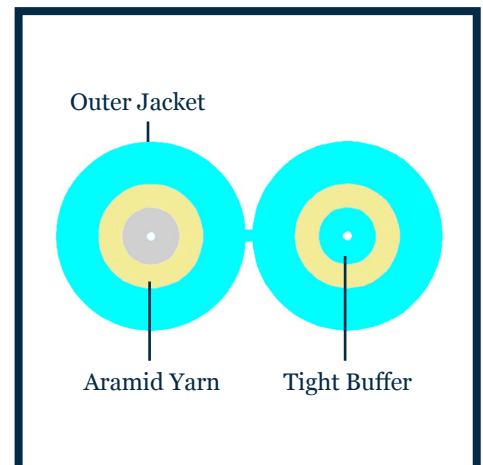

SPECIFICATIONS

Temperature Range

Storage Temperature	-40 C to +70 C
Operating Temperature	0 C to +70 C

Cable Characteristics

Fiber Count	2
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Available in 12 TIA/EIA color standard
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	White & Aqua for (MM 50/125 fiber), Blue & Orange for (SM 9/125 and MM 62.5/125 fiber)

Physical Characteristics

Nominal Outer Diameter (mm)	2.95 x 5.95/ 1.95 x 3.95/ 1.80 x 3.65/ 1.60 x 3.25
Weight (lbs/km)	40/ 28/ 20/ 14
Minimum Bend Radius (mm) (Bend Insensitive SM)	5/ 10
Minimum Bend Radius (mm) (Bend Insensitive MM)	7.5
Minimum Bend Radius (mm) (SM) 1 turn/100 turns	32/ 50

Optical Characteristics

Items	Single Mode	OM1	OM2	OM3	OM4
Core Size	9 um	62.5 um	50 um	50 um	50 um
Wavelength	(1310/ 1550) nm	(850/ 1300) nm	(850/ 1300) nm	(850/ 1300) nm	(850/ 1300) nm
Max. Attenuation	(0.5/ 0.4) dB/ km	(3.5/ 1.5) dB/ km	(3.5/ 1.5) dB/ km	(3.5/ 1.5) dB/ km	(3.5/ 1.5) dB/ km
Bandwidth (EMB) (High Performance)	–	220 MHz @850nm	850 MHz @850nm	2000 MHz @850nm	4700 MHz @850nm
Link Length (10Gb/ s)	–	–	150 mtr	300 mtr	550 mtr

Part Numbers

Fiber Count/ Size	Single Mode	OM1	OM2	OM3	OM4
02/ 2.95mm	S09DX02**NPY	M62DX02**NPO	M50DX02**NPA	M50DX02**NPA	M50DX02**NPA
02/ 1.95mm	S09DX02**NPY20	M62DX02**NPO20	M50DX02**NPA20	M50DX02**NPA20	M50DX02**NPA20
02/ 1.80mm	S09DX02**NPY18	M62DX02**NPO18	M50DX02**NPA18	M50DX02**NPA18	M50DX02**NPA18
02/ 1.60mm	S09DX02**NPY16	M62DX02**NPO16	M50DX02**NPA16	M50DX02**NPA16	M50DX02**NPA16

Fiber Type (9/125)

**

SMF-28 Ultra	CZ
SMF28e+	C
ClearCurve XB	CB
ClearCurve LBL	C7
ClearCurve ZBL	CC

Fiber Type (50/125)

**

ClearCurve OM2	C2
Clear Curve OM3	CG
ClearCurve OM4	C4

Fiber Type (62.5/125)

**

InfiniCor 300	C3
InfiniCor 1000	C1



132 Base Road
Oriskany, NY, 13424
Phone: 315-736-7384
Fax: 315-736-1927
Toll free: 1-888-571-7111
sales@thelightconnection.com
www.thelightconnection.com